

## HIGH HEAD SUMP PUMP

### RHV180 / 220

This REEFE® Twin Vortex Impeller Sump Pump, is specifically designed for applications with longer pipe runs. Ideal for heavy duty high lift situations. Manufactured with an industrial grade motor with insulation Class F.




#### Features & Benefits

- Non-clogging High Head twin Vortex impeller pump
- Solids Handling 8mm
- Liquid Temperatures 0oC to 40oC
- Thermal overload protection
- Robust particle screen

#### Construction

- Gr 304 Stainless Steel Outer Casing
- Twin Cast Iron Vortex Impellers
- Insulation Class F induction Motor
- Dual mechanical seal with oil chamber
- MAC 3 float switch
- Stainless Steel particle screen

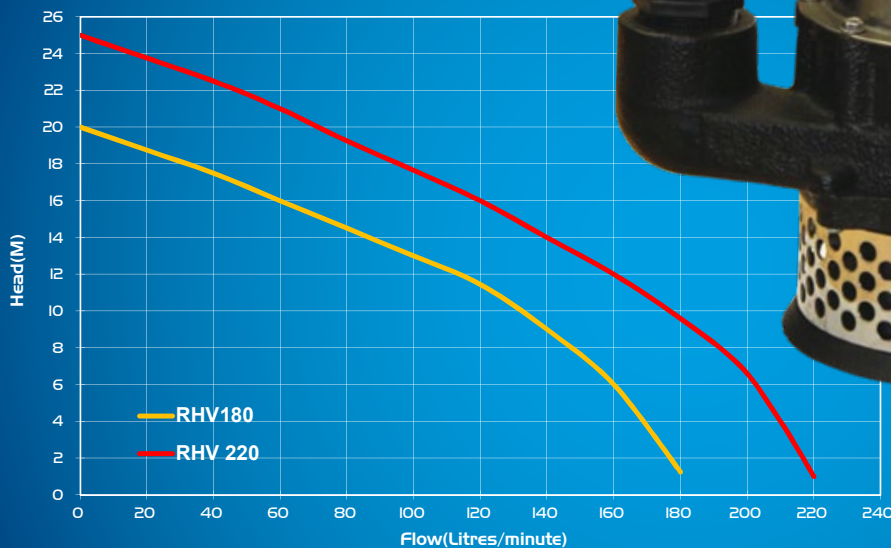

CODE	MODEL	POWER		RATED		MAXIMUM		SOLIDS HANDLING (mm)	CABLE LENGTH (m)	OUTLET		WEIGHT (KG)	SIZE (L x W x H (mm))
		AMPS	WATTS	FLOW (L/min)	HEAD (m)	FLOW (L/min)	HEAD (m)			mm	inch		
7709	RHV180	4	400	130	10	180	20	8	10	32	1 <sup>1/4</sup>	13	227 x 160 x 370
7716	RHV220	6	750	130	15	220	25	8	10	40	1 <sup>1/2</sup>	15	240 x 170 x 390

