

REG GRINDER & MACERATOR PUMPS

REG SERIES

The REEFE® REG015 macerator pump is the perfect all-rounder when it comes to wastewater. The hybrid design means you get higher flows like a cutter pump but with higher head pressure and grinding benefits of a grinder. The external cutter mechanism means the solids are cut before entering the pump which means less blockages and much easier mainenance. Suitable for industrial, agricultural, mining and dairy wastewater transfer applications.



APPLICATIONS

- Industrial wastewater
- Agricultural wastewater
- Mining camp wastewater
- Dairy waste transfer
- Fit for carrying daily sanitary wastewater and sewage containing organic waste, paper, sanitary items, mud and sand


FEATURES & BENEFITS

- Lightweight & portable
- Ideal for narrow pits & sumps
- Liquid temperature 0° to 40° C
- PH Range 4.0 to 10.0
- Unique anti-clogging impeller design

CONSTRUCTION

- Pump body: stainless steel (AISI304)
- Cast iron impeller
- Stainless steel motor shaft
- Silicone-carbide/ceramic mechanical seal
- Cast iron base
- Insulation Class B
- Protection class IP68
- Grinder mechanism made of hardened S/S grade 440C
- · Float switch



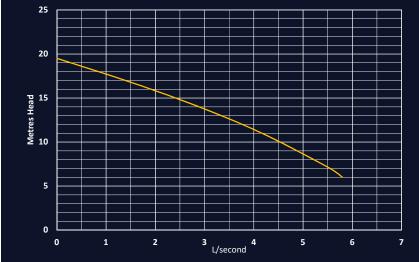

| - 1 | CODE | MODEL | OPERATION | POWER | | | MAXIMUM | | CABLE | OUTLET | | WEIGHT | SIZE |
|-----|-------|--------|-----------|-------|------|-----|-----------------|-------------|--------|--------|------|--------|-----------------|
| | | | | VOLTS | AMPS | KW | FLOW (L/SEC) | HEAD (M) | LENGTH | ММ | INCH | (KG) | LXWXH (MM) |
| | 17937 | REG015 | Auto | 240 | 9.5 | 1.5 | 5.8 | 19.5 | 10m | 50mm | 2" | 25 | 260 x 180 x 490 |